

Customer _____

Part name _____

Model No HPC1530 _____

Serial No _____

Produce No _____

Approved by		Drafted by	Wenfei liang
Checked by		Signed by	Xiaojun nie
Prepared by		Valid Date	2018-11-22

Company address: 4th Building, Meitai Technology Park, Guanguang Road, Longhua, Shenzhen, China.

(Tel) : +86-755-86670672

(Fax) : +86-755-86670609

E-mail: pkcell@pkcell.net pkcell@pkcell.com

Website: <http://www.pkcell.net> <http://www.pkcell.com>

ADD: 4th Building, Meitai Technology Park, Guanguang Road, Longhua, Shenzhen, China. 518110

1.Scope

This product specification describes the mechanical design and performance of HPC-1530 and its use in enhanced pulse-type batteries.

2.Performance Data (For batteries stored at RT for one year or less)

System	Hybrid Pulse Capacitor
Version	HPC1530
Nominal voltage	4V
Nominal capacity	300AS @ 3.67V
	510AS @ 3.90V
	640AS @ 4.10V
Nominal discharge current	125mA
Max.continuous discharge current	750mA
Pulse current capability	3000mA
Discharge end voltage	2.5V
Max.charge voltage	4.1V
Nominal charge current	50mA
Temperature range	-40°C~+85°C
Cell impedance @ 1kHz,RT	max. 120mΩ
Nominal energy	max. 0.6Wh
Length	max. 30.5mm
Diameter	max. 15.5mm
Weight	10g

4. Shelf life at different storage temperature to 80% of initial capacity

Temperature	HPC	HPC in IOT battey
RT	3 years	10 years
60°C	4 weeks	7 years
80°C	1 weeks	At least 1 years

5. Safety:

Short circuit at 22°C,55°C and 85°C

Temperature test up to 150°C

Crush

Impact

ADD: 4th Building, Meitai Technology Park, Guangguang Road, Longhua, Shenzhen, China. 518110

Nail penetration

Over charge & over discharge (200% at currents up to 1A)

UL1642 , IEC62133 , UN38.3

6. Warning:


Fire, explosion, and severe burn hazards.

do not disassemble, heat above 100°C,

short circuit, incinerate or expose contents to water.

Do not charge above 4.1V

7. Dimension:

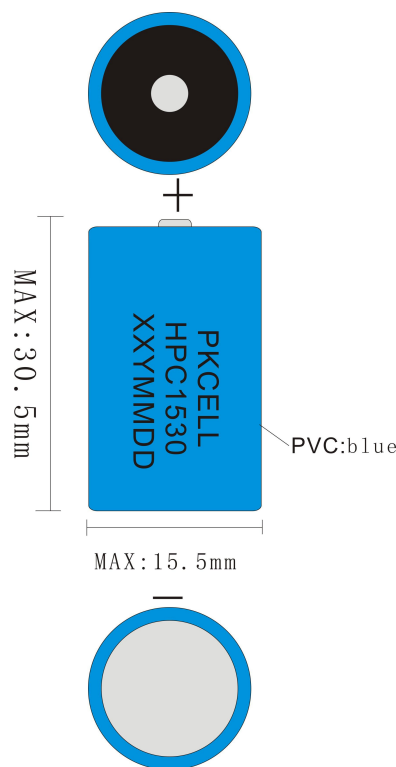

- 3 -

.....END.....